



Steady Clustering Scheme for Wireless Sensor Networks

Nikhil Jha

Department of Computer
Science & Engineering
NIIST, Bhopal
nikhil.jha.cse@gmail.com

Prof. Nitesh Gupta

Department of Computer
Science & Engineering
NIIST Bhopal
9.nitesh@gmail.com

Parul Jha

Department of Computer
Science & Engineering
NIIST Bhopal
parulbhanarkar@gmail.com

Nalin Jha

Military College of
Telecom Engg.
nalinjha1985@gmail.com

Abstract— There are many application are developed with would like of self organization for network. to satisfy this demand would like of wireless sensing element network in such applications. To manage network expeditiously bunch is employed. immeasurable works are wiped out field of wireless sensing element networks (WSNs) in previous few years. These researches have boost potential of WSNs in applications like security observation, disaster management, military space, border protection and health observation systems. Such applications are needed to be remotely deployed sensing element nodes in vast numbers and to work autonomously. Thus there got to quantifiability, nodes are usually collected into disjoint clusters. This paper, presents a categorization and customary organization of obtainable bunch proposal. This work analysis varied bunch algorithms used for WSNs and provides a review with that specialize in their objectives options, etc. and projected economical bunch technique for stable cluster formation and maintenance.

Index Terms— WSNs Clustering, Cluster head selection, Clustering comparison.

I. INTRODUCTION

Wireless sensing element network (WSN) has matured united of enticing networking technologies currently on a daily basis as its advantage of organization wherever lacking communication infrastructures. Sensing element network could be a network containing arbitrarily placed sensing element nodes and base stations (BS). The SB works as entrance to attach with public network or alternative network. WSNs offer economical knowledge assortment, storage management, quick process and access purpose to sensing element nodes in its network. Sensing element nodes are specially style to gather knowledge for its surroundings and sends current knowledge to SB. Still these nodes have restricted power, process and storage capability. Hence routing process and store route is tough task attributable to restricted resources and dynamically dynamic topology [1, 2].

Research show their interest to minimizing and low-power style tiny sized battery applied sensors that capable to sense dynamic conditions as temperature, light-weight and sound. Sensors ordinarily style for processing and communication with SB capability. Sensors have natural philosophy circuit to convert environmental physical conditions into electrical signal. each sensing element node has radio communication system that is employed to send and receive knowledge to any node together with SB.

On disaster management circumstances as example earthquakes, sensing element networks may useful for explicit map guided emergency services groups for correctly functioning. conjointly military things, health observance system and house protection system as shown in Fig. 1, sensing element networks are often used. For any police investigation missions and to notice moving targets, chemical gases, or the presence of micro-agents sensing element network and sensing element nodes ar effective technique. Sensing element nodes ar probable to be positioned arbitrarily in any desired location uncontrolled manner, like place down by any fly machine, and to along produce a network in ad-hoc behavior [4]. Coming up with and operative such would like giant network is needed ascendable field of study and economical management. Sensing element nodes gift in such kind locations energy protective is main constrain and their batteries impractical to recharged. For that reason, energy-aware algorithms style intercommunicate be a vital issue for rising the lifetime of sensing element nodes. alternative application central style objectives, e.g. hi-fi target detection and classification, are thought-about [5].

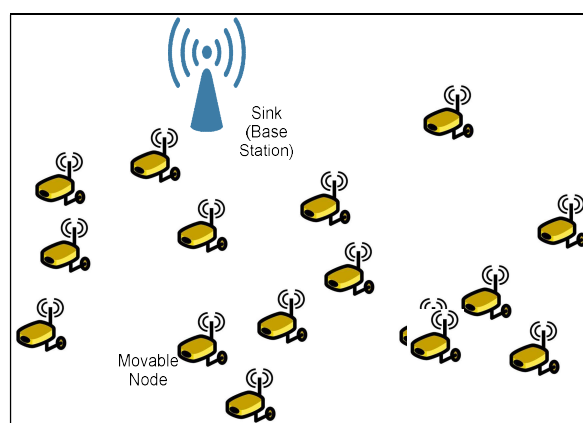


Fig. 1. An articulation of sample WSN architecture

Combination sensing element nodes into clusters square measure taken by the analysis society to induce the system measurability purpose. every cluster ought to have a manager, called the cluster-head (CH). whereas many bunch algorithms are given within the literature for ad-hoc networks [6,7], the purpose was primarily to make a lot of stable clusters in setting with mobile nodes. many techniques planned attempt to modify



International Journal of Ethics in Engineering & Management Education

Website: www.ijeee.in (ISSN: 2348-4748, Volume 9, Issue 5, May 2022)

reach ability and route stability for network not worry concerning coverage. Recently bunch techniques planned for WSNs [8,9]. These strategies reckoning on node preparation schemes characteristics of CH node and network operating model. A CH is chosen by the sensing element nodes in an exceedingly cluster by the network members. CHs might produce a second level network or simply transmit the info to base-station.

The design of routing protocols for WSNs is difficult owing to many network constraints. WSNs suffer from the constraints of many network resources, for instance, energy, bandwidth, central process unit, and storage [11, 12]. the planning challenges in sensing element networks involve the subsequent main aspects [10, 11, 12, 13]-

- Limited energy capacity
- Sensor locations
- Limited hardware resources
- Massive and random node deployment
- Network characteristics and unreliable environment:
- Diverse sensing application requirements
- Scalability

WSNs don't use specialized routers for path discovery and traffic routing develops the wireless backbone design. this implies that sure nodes should be elite to communication. one amongst the overall approaches to create up self-organize them is cluster primarily based specification. this is often achieved by partitioning unintended networks into clusters. sure nodes, called cluster-heads, would be answerable for the formation of cluster and maintenance of the topology of the network, and conjointly for the resource allocation to any or all the nodes happiness to their clusters.

The WCA has improved performance compared with alternative previous agglomeration algorithms. However, the high quality of nodes can cause high frequency of re-affiliation which is able to increase the network overhead.

II. RELATED WORK

In flat networks, every node usually plays constant role and sensing element nodes collaborate along to perform the sensing task. because of the massive range of such nodes, it's not possible to assign a worldwide symbol to every node. This thought has light-emitting diode to knowledge central routing [14], wherever the baccalaureate sends queries to bound regions and waits for knowledge from the sensors situated within the designated regions.

Since knowledge area unit being requested through queries, attribute-based naming is critical to specify the properties of knowledge. a number of routing protocols during this class are: SPIN [15], Directed Diffusion [16], Rumor Routing [17] and EBRP [18].

Hierarchical or cluster-based routing, area unit well-known techniques with special benefits associated with quantifiability and economical communication. As such, the thought of class-conscious routing is additionally used to perform energy-efficient routing in WSNs. in an exceedingly class-conscious design, higher energy nodes will be accustomed method and

send the knowledge whereas low energy nodes will be accustomed perform the sensing within the proximity of the target. a number of routing protocols during this cluster are: LEACH [19], PEGASIS [20], teen [21] and APTEEN [22].

Paper [23] proposes a load-balanced cluster formula for WSNs on the premise of their distance and density distribution, creating it primarily totally different from the previous cluster algorithms. This technique a balanced cluster formula with distributed organization for WSNs of non-uniform distribution, taking into consideration best configuration of clusters. This technique formula will kind a lot of stable and cheap cluster structure, and conjointly improves the network life cycle considerably.

WCA [24] could be a classical formula supported node degree, the amount of single-hop neighbors. The election of cluster head depends upon the factors of node degree, send-receive energy and residual energy. Meantime the scale of cluster (the communication consumes giant amounts of energy once cluster is simply too large) is proscribed so as to save lots of energy. In distinction, the WCA cluster formula is a lot of comprehensive than the antecedently projected algorithms, and a few experiments show that the performance is a lot of superior. to boot, the most downside of WCA is that it has to get the load of the node and need every node to save lots of all the knowledge of nodes before initializing network, therefore excessive amounts of computing and communications might cause excessive consumption in cluster directly..

K-clustering [25] formula will represent most k-hop non-overlapping clusters with partial networks topology data instead of the complete configuration. At constant time, it also can save energy to prolong network survival time. moreover, because of dynamic configuration changes, it's of significance learning cluster supported native data. yet, it doesn't think about cluster size and will kind unbalanced cluster. for instance, some clusters contain tremendous range of nodes, which ends in overlarge overhead of lay communication.

Different improved K-clustering algorithms are come back up with in turn to repair this downside. A representative formula is planned by lin and Chu [26] with victimization hops collectively of the constraint parameters. during this formula, the node is non appointive as cluster head arbitrarily, and also the distance between cluster members and cluster head doesn't exceed k hops. The formula is more practical in proscribing knowledge forwarding distance, however it still doesn't solve unbalanced bunch (excessive bunch nodes). additionally, during this formula, solely the basis of subtree is aware of that cluster it belongs to, whereas alternative nodes don't have this information. If the cluster head or the basis of sub-tree node fails, it'd be inefficient and unfavorable to cluster once more.

ESAC [27] formula combines the benefits of the higher than planned algorithms, and it improves bunch performance by overcoming their shortcomings. This formula uses the strategy of shrewd weight in choosing cluster head. the burden of every node is calculated wishing on the mix of 2 parameters: residual energy and quality. The cluster size ranges between 2 thresholds (Threshlower and Threshhigh), and also the distance between every cluster node and its cluster head isn't any over

2-hop. This differs from LEACH, and also the formula builds the balanceable and swish bunch network by considering the k-density, residual energy and quality therefore on avoid mounted cluster head project, which can leads to excessive energy consumption of cluster head. the method of electing cluster head is re-launched in a very bound amount (service period). It calculates the burden of {every} node in every stage of cluster head building so as to make sure the foremost applicable node to become cluster head and limit the dimensions of cluster alright. once a cluster head dies or is rapt to alternative cluster, the upkeep method is triggered. the method is comparable thereto of building cluster launched by a random member of the previous cluster, and is restricted solely to the members losing their cluster head. during this means it will avoid the previous ‘chain loop’ downside existed in bunch formula, and has very little impact on the constellation. However, the structure of 2-hop clusters isn't appropriate for all circumstances. In some cases, we want to represent clusters over 2-hop.

III. PROPOSED WORK

To solve given downside, this work propose a time-based WCA which might enhance the soundness of cluster formation followed by stable cluster head choice This paper proposes a thought for choosing stable cluster heads employing a changed Weighted clump algorithmic program and mixing it with Link Time calculation.

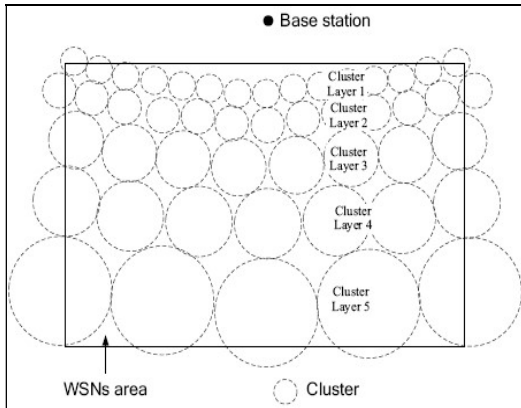


Fig. 2. DSBCA clustering in uniform distribution.

The purpose of recent DSBCA is to come up with clusters with a lot of balanced energy and avoid making excessive clusters with several nodes and a lot of stable. The clusters close to the bottom station additionally forward the info from more clusters (all clusters have to be compelled to communicate with the bottom station, however long-distance wireless communication consumes a lot of energy), and as we have a tendency to all recognize, too several members in a very cluster could bring on excessive energy consumption in management and communication. Hence, supported the on top of issues, DSBCA algorithmic program considers the property density and also the location of the node, making an attempt to make a a lot of balanced clump structure. the fundamental plan of DSBCA is predicated on the property density and also the

distance from the bottom station to calculate k (clustering radius). The clump radius is decided by density and distance: if 2 clusters have a similar property density, the cluster abundant farther from the bottom station has larger cluster radius; if 2 clusters have a similar distance from the bottom station, the cluster with the upper density has smaller cluster radius. Fig. two shows DSBCA clump in uniform distribution. DSBCA forms completely different clump layers within which the radiuses of farther clump layers area unit larger, and within the same layer the clump radius is identical. Fig. three shows DSBCA clump in non-uniform.

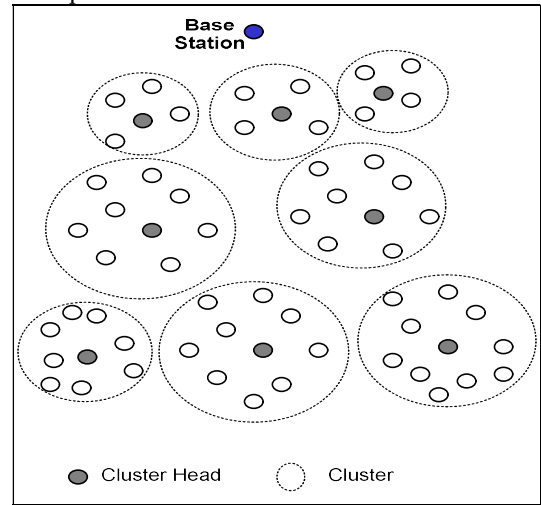


Fig. 3. DSBCA clustering in non-uniform distribution

A. Cluster Head Selecting Phase

DSBCA selects the random nodes to trigger clustering process first. Then the trigger node U_t calculates its connected density and distance from the base station to determine cluster radius k by (1), and becomes the temporary cluster head.

$$k = \text{floor}[\beta D(U_t) / D_k(U_t)] \quad (1)$$

Where $D(u)$ is the distance from the base station of u , $D_k(u)$ is the connectivity density of node u , β is the sensor parameters determined by specific applications of WSNs, and floor is the calculation of rounding. $D(u)$ can be calculated as follows.

$$D(u) = 10^{\frac{|RSSI-A|}{10-n}} \quad (2)$$

Where RSSI is received signal strength indicator, and A is the signal strength with 1 meter distance from the base station [21].

$N_k(u)$ is k-hop neighbors of node u .

$$N_k(u) = \{v \in V | v \neq u \wedge d(u, v) \leq k\} \quad (3)$$

In the case of non-uniform distribution, the cluster radiuses area unit determined by the space from the bottom station and property density of nodes. With farther distance from the bottom station and lower property density, the cluster radius is larger; on the contrary, with nearer distance from the bottom station and lower property density, the cluster radius is smaller. DSBCA is divided into 3 stages: cluster head choosing section, clusters building section and cycle section. DSBCA follows a



International Journal of Ethics in Engineering & Management Education

Website: www.ijeee.in (ISSN: 2348-4748, Volume 9, Issue 5, May 2022)

distributed approach to ascertain hierarchical data structure in self-organizing mode while not central management.

Where $d(u, v)$ is that the hops between node u and node v . we have a tendency to use hops to point distance just about. Node affiliation density is calculated by (8), and $|N_k(u)|$ is that the range of k -hop neighbors of node u .

$$D_k(u) = \frac{|(t, v) \in E/t, v \in N_k(u) \cup \{u\}|}{|N_k(u)|} \quad (4)$$

DSBCA follows a distributed approach to build hierarchical structure in self-organizing mode without central control. In this phase, the node with the highest weight in k -hop neighbors of U_t is elected as cluster head. The weight of the node is calculated by (8), which takes the residual energy, connection density, and times of being elected as cluster head of nodes into account. Thus, we can generate clusters more balanced in energy and position.

$$W(u) = \phi \times P[D_k(u)] + \varphi \times P\left[\frac{R_e(u)}{E(u)}\right] - \gamma \times P[H(u)]$$

$$0 \leq \phi, \varphi, \gamma \leq 1, \quad \gamma < \phi + \varphi < 1 \quad (5)$$

where ϕ, φ, γ as the effect factors are defined by specific application, $R_s(u)$ is the residual energy of node u , $E(u)$ is the initial energy of node u , $H(u)$ is the times of the node u being elected as cluster head. In this way we decrease the prospects of u being elected as cluster head to balance the overall energy consumption.

In the initial stage, the node U_t triggers the agglomeration method and sends howdy messages to its k -hop neighbors. The neighbors in k -hop utilize (5) to calculate the individual weight, then the node with the very best weight can become the cluster head. From then on, cluster head node broadcasts (Head_message) in its k -hop neighbors to declare itself as cluster head and asks them to hitch the cluster. Head_message includes the ID of cluster head node (HID), the ID of the causation node (SID) and also the range of hops from the cluster head (HD). once a node receives Head_message, SID may be accustomed maintain a path to achieve the cluster head. The rule discards broadcast package once HD is over k to confirm that the cluster isn't any over k -hop. once a neighbor node receives Head_message, albeit it's already in a very cluster, it sends Join_message to the cluster head to request change of integrity the new cluster as long as its weight is lower. Head_message is restricted to transmission inside k -hop, thus it should happen that some nodes couldn't receive any Head_message. In DSBCA rule, if the node doesn't receive Head_message in $T(w)$ ($T(w) \leq T(k)$), it declares itself the cluster head, wherever $T(w)$ is waiting time, and $T(k)$ is that the refresh time associated with distribution of nodes and specific applications. The settings of $T(w)$ and $T(k)$ ought to make sure that every node within the network will notice its own cluster head, and also the rule restarts the agglomeration method once $T(k)$ circularly.

B. Clusters Building Phase

DSBCA sets the brink of cluster size. the amount of cluster nodes cannot exceed the brink to avoid forming giant clusters,

which can cause further overhead and therefore scale back network time period. once the cluster head node receives Join_message sent by the standard node, it'll compare the scale of cluster with threshold to just accept new member and update the count of cluster nodes if the scale is smaller than threshold, or reject the request. If the rejected node has cluster head already, the clump method ceases. Otherwise, it finds another applicable cluster to hitch. every member node of cluster maintains a cluster info table, that saves the HID, HD, SID and different info. If a node receives transmission packet in work, it'll update its cluster info table correspondingly.

C. Clustering Maintenance Using Mobility prediction

The quality of nodes not to mention the transient nature of wireless media usually leads to a extremely dynamic topology. owing to quality some nodes can detach from the present cluster and connect itself to another cluster. the method of connection a brand new cluster is understood as re-affiliation. If the re-affiliation fails, the complete network can recall the cluster head election routine. One disadvantage of WCA is high re-affiliation frequency. High frequency of re-affiliation can increase the communication overhead. Thus, reducing the quantity of re-affiliation is critical in impromptu networks. to forestall this we tend to opt for quality prediction schemes. The impact of quality prediction schemes on the temporal stability of the clusters obtained employing a mobility-aware cluster framework. we tend to propose an easy framework for a quality prediction-based cluster to boost the cluster stability.

One way to predict the quality of nodes is exploitation the Link Time. Work out the Link Time (LT) to predict the length of a wireless link between 2 nodes within the network. The approach assumes that the direction and speed of motion of the mobile nodes doesn't amendment throughout the prediction interval..

D. Link Time (LT)

The Link Time (LT) could be a straightforward prediction theme that determines the period of a wireless link between 2 nodes. Dynamic bunch in networks has conjointly been extensively studied within the literature. The Weighted bunch rule (WCA) is one such theme, wherever four parameters area unit thought-about for the cluster head election procedure, that area unit representative of degree, the add of the distances to alternative nodes in radio distance, mobility, and battery power of the mobile nodes.

Here we tend to propose associate degree increased DSBCA which might enhance steadiness of the network. Such a theme will be tuned flexibly the parameters to suit to totally different situations. To calculate the period of link between 2 mobile nodes, we tend to assume that their location, speed and direction of movement stay constant.

Here let:

Location of node i and node j at time t be given by (x_i, y_i) and (x_j, y_j) . V_i and V_j the speed of the nodes. θ_i and θ_j be the directions of the nodes i and j respectively. Link expiration time D_t is given by the formula given below.

$$D_t = 1 - (\sqrt{(x_i - x_j)^2 + (y_i - y_j)^2} / \text{MaxDist} + |V_i - V_j| / \text{MaxSpeed})$$

Value D_t of D_t is max if distance of nodes i and j is min and speed difference is min hence value is subtract from 1, to get maximum link connection value.

The LT offers associate edge on the estimate of the duration of a node in a very cluster. within the projected agglomeration framework, once LT-based prediction is employed, a node is allowed to affix a cluster as long as the expected LT of the link between the node and therefore the cluster head is larger than the clusters admission criteria T_j . for each node N that detach from current cluster we tend to check whether or not the node may be a Cluster Head or Cluster member.

I. If it's a Cluster Head then require cluster head election at intervals the actual cluster and type a replacement cluster.

II. If it's a Cluster member then calculate Link Expiration Time with Cluster Head of every cluster and therefore the nodes that re-affiliate should be at intervals transmission vary of cluster head wherever transmission vary is mounted. Check whether or not LT is larger than threshold price (T_j), Here T_j is average of all LT, and if it's larger than the Node is eligible to affix the actual cluster that shares larger LT.

IV. RESULTS AND DISCUSSION

In this section, we evaluate the performance of the proposed algorithm. This paper considered first order wireless model standards simulation and the simulation parameters for our model. To validate the performance of stable clustering scheme, simulate a heterogeneous clustered wireless sensor network in a field with dimensions 100m by 100m. The total number of sensor nodes $n = 144$ and 196 respectively. The super, advanced and normal nodes randomly distributed over the field. This means that the horizontal and vertical coordinates of each sensor are randomly selected between 0 and maximum value of the dimension. The sink or base station is in the center and so, the maximum distance of any node from the sink is approximately 70 m. the transmission range for any node to transmit messages are approximate 30m.

We compare proposed algorithm with the classical DSBCA, LEACH, HEED and WCA, observing the network lifetime especially. DSBCA generates harmonious clusters to decrease the energy cost of communication in the cluster, so it prolongs the network lifetime. Fig. 4 and fig. 5 show respectively the aver-age rounds of communication in 20 experiments for various algorithms, when 10%, 20%, 30%, 40%, 50%, 60%, 70% and 80% of nodes are dead. The simulation conditions are 144 nodes (Fig. 4) distributed evenly and 196 nodes (Fig. 5) distributed evenly. We can see that, for the same round, DSBCA has lower ratio of dead nodes compared to the other algorithms.

As results shown proposed algorithm Stable clustering method can form more reasonable cluster structure to avoid frequent exchange of the nodes weight information and temporary cluster head broadcasting after the primary clustering. As a result, the energy consumption decreases effectively. Hence nodes have more lifetime span during communication with having less dead nodes. The cluster structure changes in each round in DSBCA, LEACH, HEED

and WCA; nevertheless, proposed algorithm maintains relatively stable clustering structure within which switching of cluster head often occurs within the same cluster

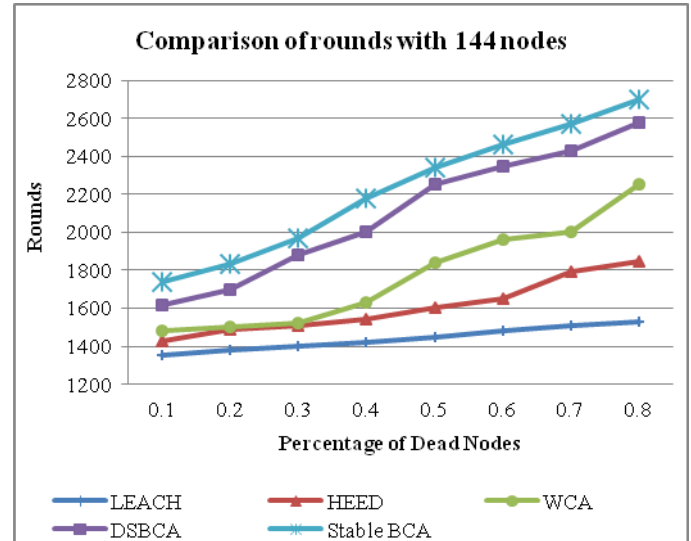


Fig. 4. Comparison of rounds with 144 nodes distributed evenly.

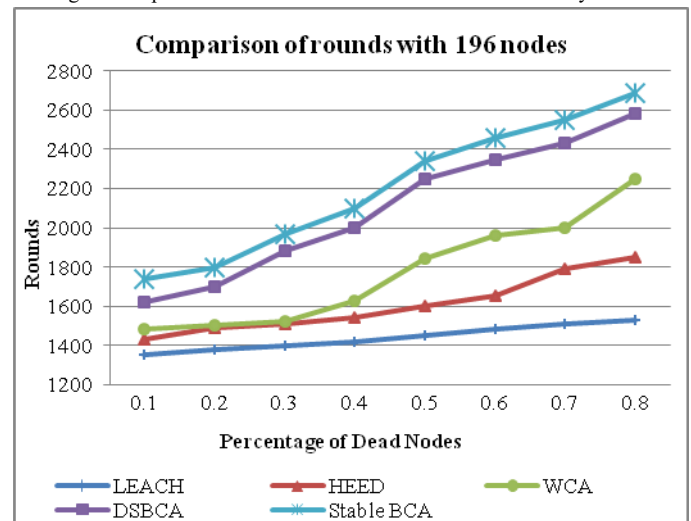


Fig. 5. Comparison of rounds with 196 nodes distributed evenly

V. CONCLUSION

Wireless sensor networks (WSNs) have gotten major concentration over the last decade. Massive numbers of application depends on WSNs like civil and military applications for inflated effectiveness, chiefly in unfriendly and remote areas or rural areas. WSNs area unit varied required things wherever ancient techniques fail as demand for examples disaster management, border security, battle field inspections. These applications embody sizable amount of detector nodes area unit expected, want careful structure and organization of the network. To satisfy these necessities grouping nodes into clusters is become the foremost loved answer thanks to support quantifiability in WSNs. Main awareness has been paid to cluster techniques and algorithms



International Journal of Ethics in Engineering & Management Education

Website: www.ijeee.in (ISSN: 2348-4748, Volume 9, Issue 5, May 2022)

got an oversized range of researches done. This paper, review existing analysis work and offers comparison of latest schemes. This paper review previous work worn out field of WSNs and offers categorization various attributes needed for economical WSNs style.

This paper proposes a balanced agglomeration procedure with distributed organization for WSNs of non-uniform distribution, taking into consideration optimum configuration of clusters. Compared with initial agglomeration algorithms, the considered procedure will kind a lot of stable and affordable cluster structure, and additionally improve the network life cycle considerably. The simulation result shows that the formula is possible and has superior performance..

REFERENCES

- [1] K. Akkaya, M. Younis, A survey of routing protocols in wireless sensor networks, Elsevier Ad Hoc Network Journal 3/3 (2005) 325–349.
- [2] J.N. Al-Karak, A.E. Kamal, Routing techniques in wireless sensor network: a survey, IEEE Wireless Communications 11 (2004) 6–28.
- [3] C-Y. Chong, S.P. Kumar, Sensor networks: evolution, opportunities, and challenges, Proceedings of the IEEE 91 (8) (2003) 1247– 1256.
- [4] R. Min, et al., Low power wireless sensor networks, in: Proceedings of International Conference on VLSI Design, Bangalore, India, January 2001.
- [5] R. Burne, et. al., A self-organizing, cooperative UGS network for target tracking, in: Proceedings of the SPIE Conference on Unattended Ground Sensor Technologies and Applications II, Orlando Florida, April 2000.
- [6] Kawadia, P.R. Kumar, Power control and clustering in Ad Hoc networks, in: Proceedings of IEEE INFOCOM, San Francisco, CA, March 2003.
- [7] M. Chatterjee, S.K. Das, D. Turgut, WCA: a Weighted Clustering Algorithm for mobile Ad Hoc networks, Cluster Computing 5 (2) (2002) 193–204.
- [8] S. Ghiasi, A. Srivastava, X. Yang, M. Sarrafzadeh, Optimal energy aware clustering in sensor networks, Sensors Magazine MDPI 1 (1) (2004) 258–269.
- [9] O. Younis, S. Fahmy, HEED: A Hybrid, Energy-Efficient, Distributed clustering approach for Ad Hoc sensor networks, IEEE Transactions on Mobile Computing 3 (4) (2004) 366–379.
- [10] Jun Zheng and Abbas Jamalipour, “Wireless Sensor Networks: A Networking Perspective”, a book published by A John & Sons, Inc, and IEEE, 2009.
- [11] Jamal Al-Karaki, and Ahmed E. Kamal, “Routing Techniques in Wireless Sensor Networks: A Survey”, IEEE Communications Magazine, vol 11, no. 6, Dec. 2004, pp. 6-28.
- [12] Kemal Akkaya and Mohamed Younis, “A Survey on Routing Protocols for Wireless Sensor Networks”, Ad hoc Networks, vol. 3, no. 3, May 2005, pp. 325-349.
- [13] N. Bulusu, J. Heidemann, and D. Estrin, “GPS-less Low Cost Outdoor Localization for Very Small Devices”, IEEE Personal Communication Magazine, vol. 7, no. 5, Oct. 2000, pp. 28-34.
- [14] I.F. Akyildiz et al., Wireless sensor networks: a survey, Computer Networks 38 (2002) 393–422.
- [15] W. Heinzelman, J. Kulik, H. Balakrishnan, Adaptive protocols for information dissemination in wireless sensor networks, in: Proceedings of ACM/IEEE International Conference on Mobile Computing and Networking MobiCom’99, Seattle, WA, 1999.
- [16] C. Intanagonwiwat, R. Govindan, D. Estrin, Directed diffusion: a scalable and robust communication paradigm for sensor networks, in: Proceedings of ACM MobiCom’00, Boston, MA, 2000, pp. 56–67.
- [17] D. Braginsky, D. Estrin, Rumor routing algorithm for sensor networks, in: Proceedings of the First Workshop on Sensor Networks and Applications (WSNA), Atlanta, GA, October 2002.
- [18] S. Madiraju, C. Mallanda, R. Kannan, A. Duresi, S.S. Iyengar, EBRP: energy band based routing protocol for wireless sensor networks, Department of Computer Science, Louisiana State University, 298 Coates Hall, LA 70803, USA, 2004.
- [19] W. Heinzelman, A. Chandrakasan, H. Balakrishnan, Energy-efficient communication protocol for wireless microsensor networks, in: Proceedings of the 33rd Hawaii International Conference on System Sciences (HICSS’00), January 2000.
- [20] S. Lindsey, C.S. Raghavendra, PEGASIS: power efficient gathering in sensor information systems, in: Proceedings of the IEEE Aerospace Conference, Big Sky, Montana, March 2002.
- [21] Manjeshwar, D.P. Agrawal, TEEN: a protocol for enhanced efficiency in wireless sensor networks, in: Proceedings of the 1st International Workshop on Parallel and Distributed Computing Issues in Wireless Networks and Mobile Computing, San Francisco, CA, April 2001.
- [22] Manjeshwar, D.P. Agarwal, APTEEN: a hybrid protocol for efficient routing and comprehensive information retrieval in wireless sensor networks, in: Parallel and Distributed Processing Symposium. Proceedings International, IPDPS 2002, pp. 195–202.
- [23] Ying Liao, Huan Qi, and Weiqun Li, “Load-Balanced Clustering Algorithm with Distributed Self-Organization for Wireless Sensor Networks”, IEEE Sensors Journal, Vol. 13, No. 5, May 2013.
- [24] M. Chatterjee, S. K. Das, and D. Turgut, “WCA: A weighted clustering algorithms for mobile ad hoc networks,” Cluster Comput., vol. 5, no. 2, pp. 193–204, 2002.
- [25] Y. Fernandez and D. Malkhi, “K-clustering in wireless ad-hoc networks,” in Proc. 2nd ACM Workshop Principles Mobile Comput. Conf., Oct. 2002, pp. 31–37.
- [26] H. C. Lin and Y. H. Chu, “A clustering technique for large multihop mobile wireless networks,” in Proc. 51st Int. Conf. Veh. Technol., May 2000, pp. 1545–1549.
- [27] M. Lehsaini, H. Guyennet, and M. Feham, “A novel cluster-based selforganization algorithm for wireless sensor networks,” in Proc. Int. Symp. Collabor. Technol. Syst. Conf., May 2008, pp. 19–26